



Силата на червеното
Най-сигурният път към върха

JIB		Max. Capacity m/t	20	22.5	25	27.5	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	55	57.5	60
60	⌋	2.5~30.6/4.0t	4.00					3.73	3.41	3.13	2.89	2.68	2.49	2.33	2.17	2.04	1.92	1.80	1.70
	⌋⌋	2.5~16.7/8.0t	6.49	5.66	5.01	4.47	4.03	3.66	3.34	3.06	2.82	2.61	2.42	2.26	2.11	1.97	1.85	1.73	1.63
55	⌋	2.5~32.8/4.0t	4.00					3.70	3.40	3.15	2.92	2.72	2.54	2.38	2.23	2.10			
	⌋⌋	2.5~17.8/8.0t	7.01	6.12	5.42	4.85	4.37	3.97	3.63	3.34	3.08	2.85	2.65	2.47	2.31	2.16	2.03		
50	⌋	2.5~34.1/4.0t	4.00					3.87	3.57	3.30	3.06	2.85	2.67	2.50					
	⌋⌋	2.5~18.5/8.0t	7.32	6.40	5.67	5.07	4.58	4.16	3.81	3.50	3.23	3.00	2.79	2.60	2.43				
45	⌋	2.5~34.5/4.0t	4.00					3.93	3.62	3.35	3.11	2.90							
	⌋⌋	2.5~18.7/8.0t	7.43	6.49	5.75	5.15	4.65	4.22	3.86	3.55	3.28	3.04	2.83						
40	⌋	2.5~34.9/4.0t	4.00					3.99	3.67	3.40									
	⌋⌋	2.5~19.0/8.0t	7.53	6.58	5.83	5.22	4.71	4.29	3.92	3.61	3.33								
35	⌋	2.5~35.0/4.0t	4.00																
	⌋⌋	2.5~19.4/8.0t	7.72	6.75	5.99	5.36	4.84	4.40	4.03										
30	⌋	2.5~30.0/4.0t	4.00																
	⌋⌋	2.5~19.7/8.0t	7.86	6.88	6.09	5.46	4.93												

Anchorage

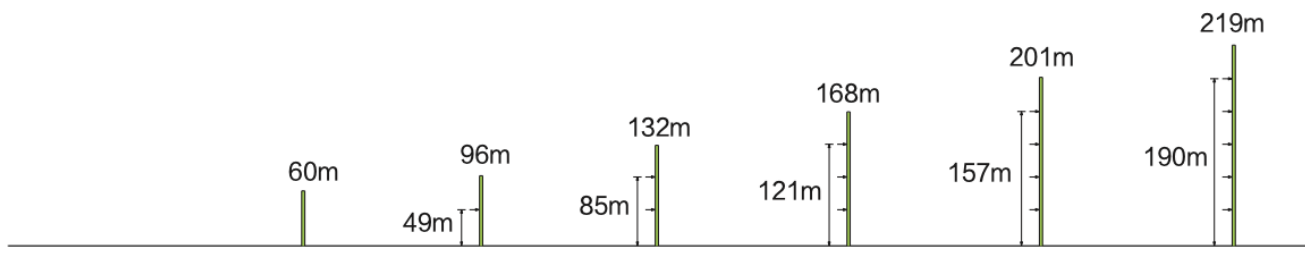

机构特性 Mechanisms specification

名称 Items	机构代号 Mechanism	工作速度 / 起重量 Speed/ Hoist weight					电动机 Motor Kw
		m/min	t	m/m in	t		
提升 Hoisting	30FC20-440	0-8.5 0-57 0-80	4.0 2.7 1.5	0-4.2 0-23 0-40	8.0 8.0 8.0	440m	30
变幅 Trolleying	4DCV	0-100					4
回转 Slewing	RCV95	0-0.7rpm					2 x 4
行走 Traveling	OMD45	0-0.7rpm					-----
	18TVF	0-25 m/min					4x3.4

供电参数 Power supply parameters

380/415V (± 5%) 50 Hz / 60Hz		kVA
		63



YOUR TRUSTED CRANE PARTNER